



# ROUNDBASSCORNER®

TUNED ABSORPTION PANEL



Image of 120x50cm model Ref.:RC0120 (on the left) and Ref.:RC0120 (ambient image).

## DESCRIPTION


It is of paramount importance to control the low range of the sound spectrum in any music room. In corners, for example, long waves are usually generated, as well as stationary low frequencies, which are heard as a "boom", thus making them slack, loose and disjointed from the rest of the spectrum range.

Applying JOCAVI's ROUNDBASSCORNER® is necessary. This panel, which is extremely efficient at holding back excessive levels of low frequencies, is manufactured with an exclusive production membrane applied over a tuned box.

The ROUNDBASSCORNER® panel provides a good reduction of energy between 40 Hz and 400 Hz. Its highest level of reduction is at 125 Hz. This product reduces or eliminates unwanted low resonances.

Because of their trapezoidal shape, these panels look discreet in the room, since they are installed in corners which are usually overlooked.

## TECHNICAL DRAWINGS

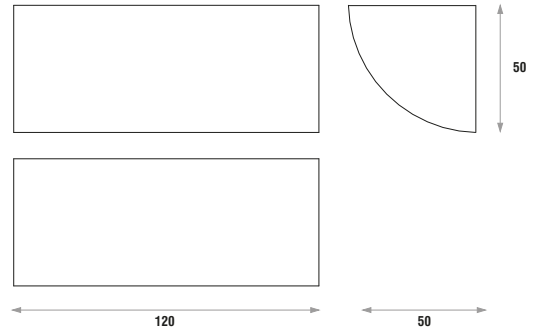


## FEATURES

- Uses 60% of recycled materials.
- Tuned to 125Hz.
- Average absorption: **0.92/m²** (>50Hz; <250Hz).
- Fire-resistance: Euroclass B (similar to old M1).
- 100% recyclable.
- Installation: accessories included.

## MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
RC0120	120 cm	50 cm	50 cm	22 Kg

## ABSORPTION COEFFICIENT

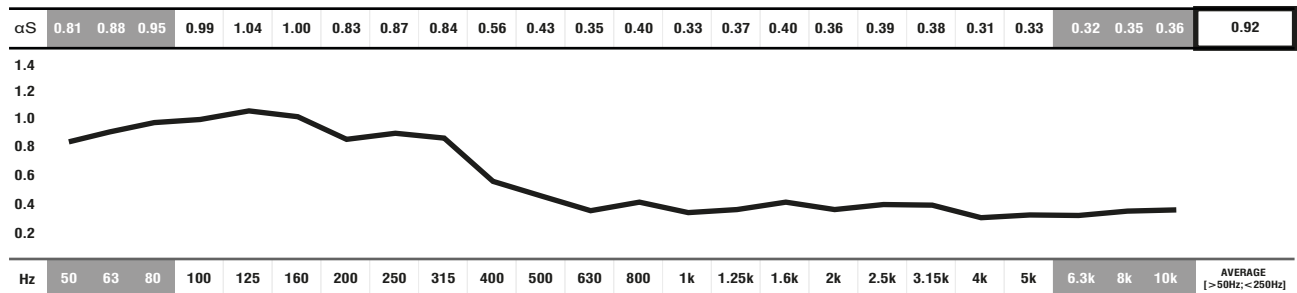

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [<100Hz and > 5K] are Non Standard Values.

## STANDARD FABRIC COLOURS



## IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- RAL® is an international independent colour standard system partner for industry, trade, architecture and design. Should be consulted before placing any order.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Wood and Fabric products are highly susceptible to change its appearance with humidity and temperature. Close attention must be paid to the storage conditions and the acclimatization before, during and after the installation.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.

