



CORALREEF®

DIFFUSION PANEL

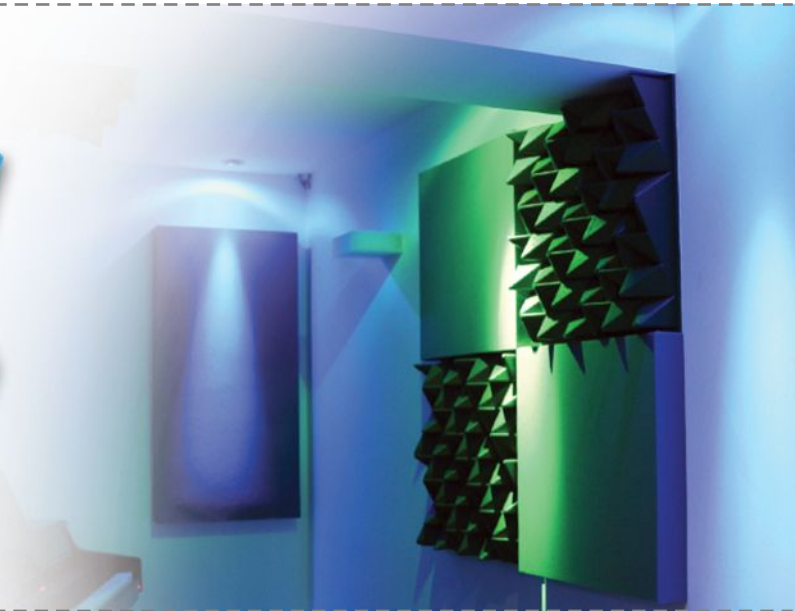
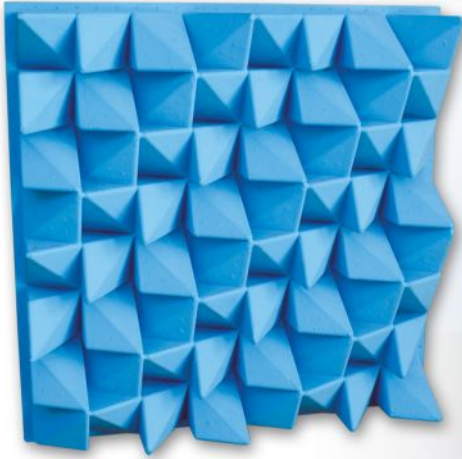


Image of 60x60cm model Ref.:COR060.

DESCRIPTION


The CORALREEF® is a 3D controlled dispersion acoustic diffusion panel. It is made of high-density polystyrene and its finishing membrane provides it with the intended acoustic qualities.

Its angular appearance gives dynamics to any space and provides a decorative effect and attractive combinations.

This acoustic panel is installed on ceilings and walls. Its low weight makes it the ideal product for use on false ceilings, on its own or alternated with flat modules when refinement and quality are required.

The calculation basis was the theoretical numerical sequence ratio of the primitive root, thus providing excellent results of sound diffusion in all directions. The depth factor is logarithmically varied, and it is, therefore, a three-dimension omnidirectional reflection panel. Due to its quite sinuous shape with deep recesses, as well as the raw material it is made of, this product also has a considerable associated absorption coefficient.

TECHNICAL DRAWINGS



FEATURES


- Manufactured with High-Density EPS.
- Average diffusion: 0.68/m² [$>100\text{Hz}$; $<5\text{KHz}$].
- Made with an ecological paint.
- EPS Fire Reaction: Euroclass E(NP EN 13501-1).
- 100% recyclable.
- Package: 3 and 6 units.
- Installation: accessories included.

MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
COR060	60 cm	60 cm	12 cm	1.9 Kg


DIFFUSION - ABSORPTION COEFFICIENT

	0.09	0.22	0.34	0.43	0.59	0.62	0.68	0.73	0.65	0.66	0.69	0.74	0.70	0.68	0.66	0.68	0.72	0.75	0.76	0.72	0.70	0.62	0.58	0.49	0.68
α_S	0.00	0.00	0.02	0.06	0.07	0.10	0.21	0.36	0.50	0.39	0.28	0.22	0.26	0.29	0.31	0.24	0.20	0.17	0.18	0.13	0.11	0.09	0.07	0.08	0.28

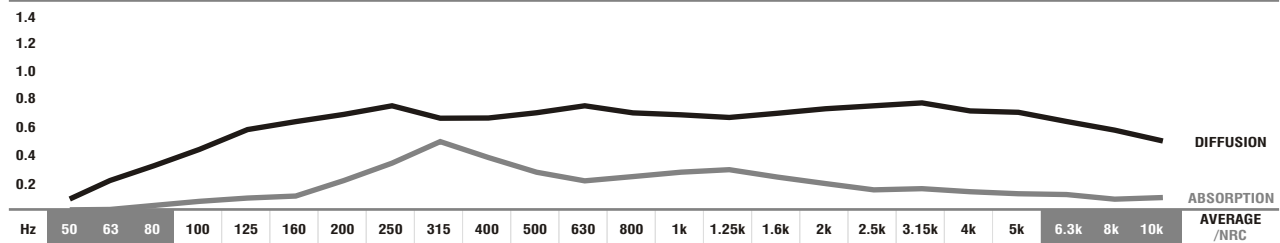

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654. ■ Values [$<100\text{Hz}$ and $>5\text{K}$] are Non Standard Values.
 ■ DIFFUSION COEFFICIENT: These values were obtained by mathematical calculations and tests carried out in our laboratory.

STANDARD EPS RAL COLOURS

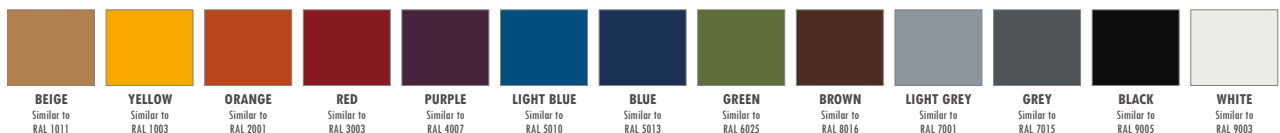

IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- RAL® is an international independent colour standard system partner for industry, trade, architecture and design. Should be consulted before placing any order.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.

