



*MOTIF® FINISHING AVAILABLE

Image of 120x30cm model Ref.:TUB120 (on the left) and Ref.:TUB120 applied (ambient image).


DESCRIPTION

The TUBABSORBER SY® is a smaller version of similar product TUBABSORBER®. Due to its smaller resonance chamber, this product is tuned to a higher frequency, i.e., 250Hz. This product can be placed in small or medium-sized rooms as an absorber of medium/low frequencies or as an application complement in larger rooms. The materials used in its manufacture are very light and highly efficient, thereby making this model quite versatile when being mounted and efficient on its applications. This product can also be installed on the vertical and horizontal edges between walls and ceilings, by using the accessories we supply for that purpose.

FEATURES

- Uses 60% of recycled materials.
- Tuned to 250Hz.
- Average absorption: 0.84/m² [$>50\text{Hz}; <250\text{KHz}$].
- 100% recyclable.
- Fire-resistance: M2.
- Package: 2 and 4 units.
- Installation: accessories included.


TECHNICAL DRAWINGS

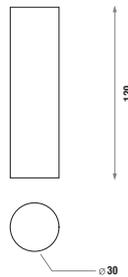

MODELS AND SIZES

MODELS	HEIGHT	DIAMETER	WEIGHT
TUB120	120 cm	30 cm	7 Kg

ABSORPTION COEFFICIENT

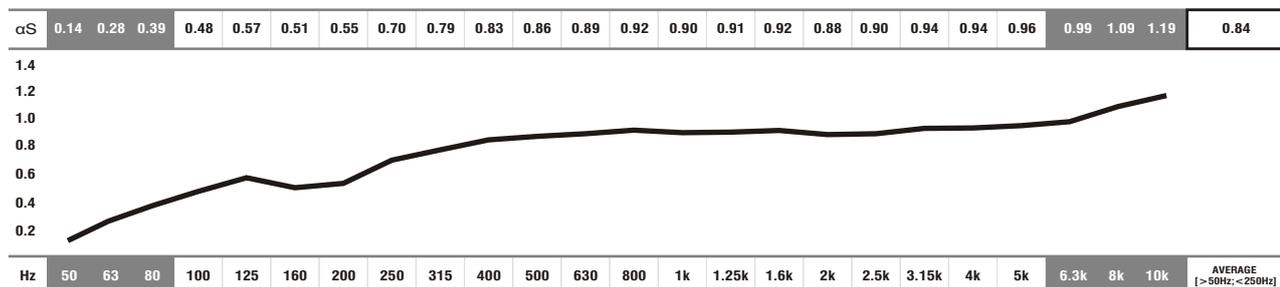

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [$<100\text{Hz}$ and $> 5\text{K}$] are Non Standard Values.

STANDARD FABRIC COLOURS



IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- RAL® is an international independent colour standard system partner for industry, trade, architecture and design. Should be consulted before placing any order.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Wood and Fabric products are highly susceptible to change its appearance with humidity and temperature. Close attention must be paid to the storage conditions and the acclimatization before, during and after the installation.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.