

(I) BASSLAYER®

NEW



COLOURS

Control of low frequencies in audio rooms is always essential. The absorption of this energy works out well when the appropriate solution is looked for.

We have tried to come up with a product that has a good technical performance, whose size does not hinder its application and that is a solution to most types of rooms. This product is recommended for audition rooms or music rehearsal rooms whose volumetric dimensions range between 32m³ and 220m³, obviously by using the number of products that is proportional to the space in question.


Basslayer® is a low frequency absorption panel. It is a hard membrane absorber inside a box with four lateral holes and tuned to 80hz. Its shape is both appealing and discreet and it is a good option for application to walls or ceilings. It can also be applied in pairs to the corners of rooms turning into a highly efficient Basscorner.

This product can be combined with the Mellowalltrap® absorption panel to complement the absorption of medium frequencies.

MODEL SIZES


	H	W	D	Kg
BXL120	120 cm	60 cm	20 cm	9.9

TECHNICAL DRAWING

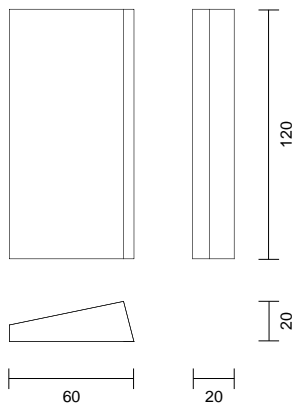

BXL120

GRAPHIC

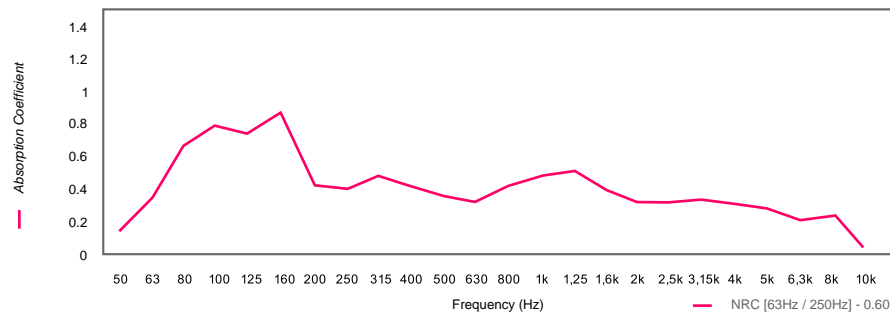

VALUES

														Absorption Coefficient									
50	63	80	100	125	160	200	250	315	400	500	630	800	1k	1.25k	1.6k	2k	2.5k	3.15k	4k	5k	6.3k	8k	10k
0.15	0.37	0.65	0.78	0.71	0.85	0.42	0.40	0.48	0.42	0.37	0.34	0.42	0.49	0.51	0.40	0.34	0.34	0.36	0.33	0.27	0.21	0.23	0.06

— Values in accordance with the Standards: EN 20354, ASTM C423 and EN 11654. ■ Non Standard values.