

This panel is mainly used in auditoriums, conference rooms, multi-purpose rooms, etc.. It is a unidirectional absorption and diffusion panel, particularly efficient in the medium range of the sound spectrum.

Three absorbent materials are used inside it, which have different densities and allow different degrees of permeability/frequency, thus widening its bandwidth efficiency.


In large areas, its application can be either continuous or modular by alternating it with other products from this catalogue.

Although this panel is manufactured in two standard sizes, other dimensions can be considered depending on the project in hand. The use of wood in rooms makes them more comfortable and, therefore, this is a very popular product.


MODEL SIZES

	H	W	D	Kg
ADD120	120 cm	60 cm	8 cm	12.6
ADD060	60 cm	60 cm	8 cm	6.3

GRAPHIC

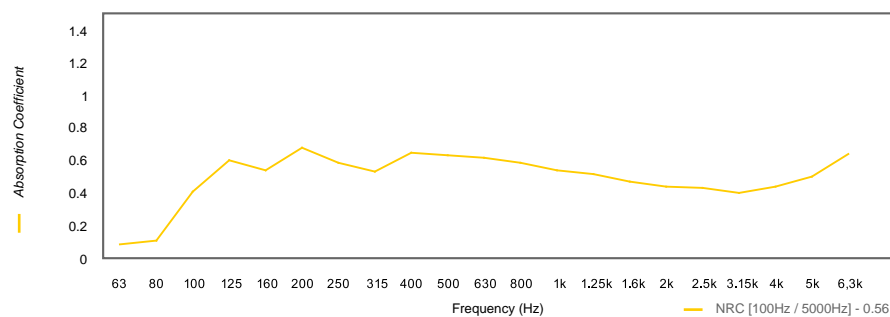

TECHNICAL DRAWING

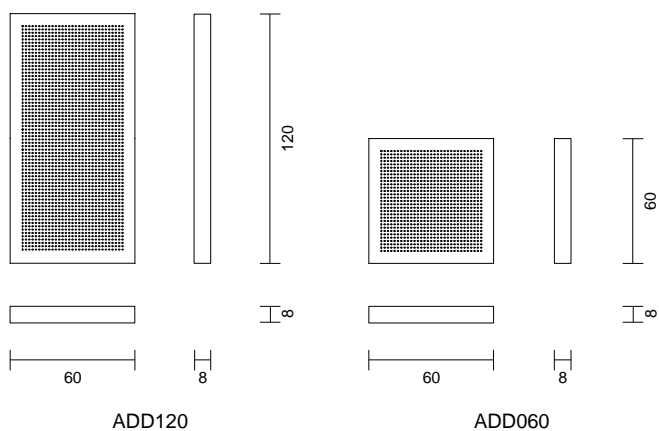

VALUES

														Absorption Coefficient						
63	80	100	125	160	200	250	315	400	500	630	800	1k	1.25k	1.6k	2k	2.5k	3.15k	4k	5k	6.3k
0,07	0,09	0,39	0,58	0,52	0,66	0,57	0,51	0,63	0,61	0,6	0,57	0,52	0,5	0,45	0,42	0,41	0,38	0,42	0,48	0,62

— Values in accordance with the Standards: EN 20354, ASTM C423 and EN 11654. ■ Non Standard values.