

SEAFOAM®



COLOUR

In order to widen its array of absorption panels, JOCAVI® has created the Seafoam®. It is an absorption panel made of low density foam with a thoroughly optimised shape.


It has been mainly designed to be applied to false ceilings, but it can also be applied to walls. Shopping areas, large public spaces, meeting rooms, etc. need specific care in terms of noise. It is therefore imperative to create surfaces that absorb sound waves efficiently. This product has that important feature.

This product is ready to be mounted, just remove the protective film from the one-sided sticker and press it against the wall or ceiling. Due to its low cost, this product can also be applied over large areas.

MODEL SIZES


	H	W	D	Kg
SFM060	60 cm	60 cm	13.7 cm	1.4

TECHNICAL DRAWING

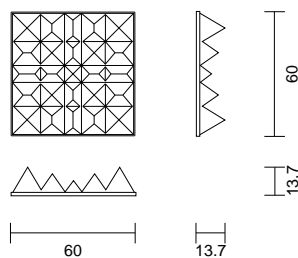

SFM060

GRAPHIC

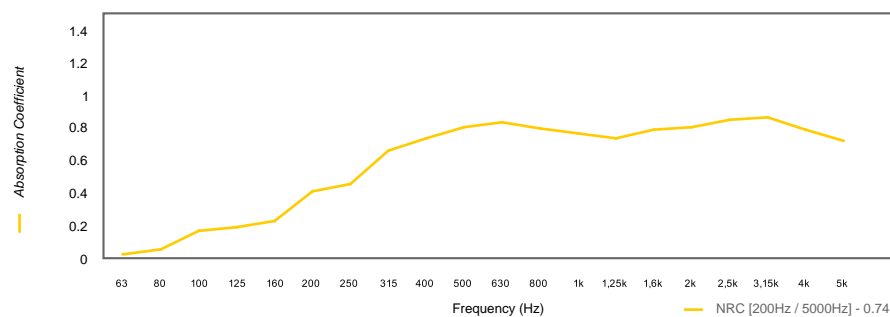

VALUES

		Absorption Coefficient																	
63	80	100	125	160	200	250	315	400	500	630	800	1k	1,25k	1,6k	2k	2,5k	3,15k	4k	5k
0,02	0,05	0,17	0,19	0,23	0,41	0,46	0,66	0,74	0,81	0,84	0,80	0,77	0,74	0,79	0,81	0,85	0,87	0,79	0,72

— Values in accordance with the Standards: EN 20354, ASTM C423 and EN 11654. ■ Non Standard values.