


(I) ROUND BASS CORNER®



COLOURS

It is of paramount importance to control the low range of the sound spectrum in any music room. In the corners, for example, very long waves are generated and low stationary frequencies are heard as a "boom", thus making the low frequencies slack, flabby and disjointed from the rest of the spectrum.

Applying JOCAVI's Roundbasscorner® is imperative. This panel, which is extremely efficient at holding back excessive levels of low frequencies, is manufactured with an exclusive production membrane applied to a tuned box.


The Roundbasscorner® panel offers a good reduction of energy between the 50 Hz and the 315 Hz range, with its maximum efficiency at 125 Hz. This product reduces or eliminates unwanted low resonances.

Due to its trapezoidal shape, this panel looks very discreet in a room, as it is applied to corners which are not normally used.

MODEL SIZES


	H	W	D	Kg
RCO120	120 cm	50 cm	50 cm	22

TECHNICAL DRAWING

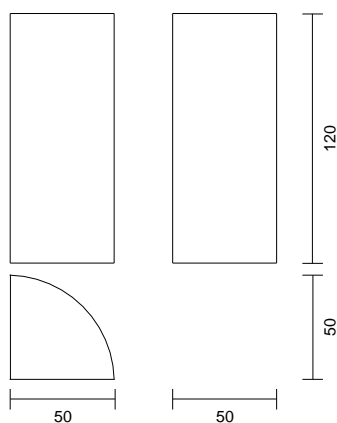

RCO120

GRAPHIC

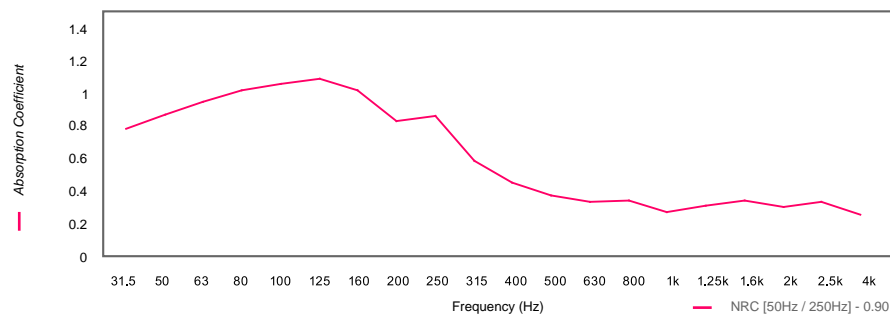

VALUES

																Absorption Coefficient					
31.5	50	63	80	100	125	160	200	250	315	400	500	630	800	1k	1.25k	1.6k	2k	2.5k	4k		
0,72	0,81	0,88	0,95	0,99	1,02	0,95	0,77	0,8	0,53	0,4	0,33	0,29	0,3	0,23	0,27	0,3	0,26	0,29	0,21		

— Values in accordance with the Standards: EN 20354, ASTM C423 and EN 11654. ■ Non Standard values.